

## Standard Configurations

Overload Sensor and Alarm  
Tilt/Slope Sensors and Alarm  
Self-closing/Self-catching Gate  
Higher Platform Rails (Foldable)  
Solid Non-marking Tires  
Swing-out Component Trays  
Descent Protection and Alarm  
Flashing Beacons (Both Sides)  
Pothole Protectors  
Universal Control Box  
Quick Disconnect for Control Box  
Foot Pedal Extended Platform  
Proportional Control  
Lanyard Points  
Manual Brake Release  
Emergency Descent  
Horn and Hour Meter  
Full Height Drive  
Intelligent Diagnostic System  
AC Platform Power (GFCI)  
Charging Protection System  
Wind Rating Stickers  
LED Battery Charging Indicator

# ANSI A92.20 Slab Scissor Lifts



LGMG North America Inc.




## ELECTRIC MOTOR DRIVE

# AS2632E Scissor Lift (Indoor)

- Optimized to deliver longer-lasting performance for jobs that are inside
- Battery-powered with zero emissions means it is environmentally friendly and great for indoor use
- A superior electronic control system that allows for better braking abilities on long downhill
- Improved steering mechanism reduces tire wear during turning

### Product Specifications AS2632E

Platform Capacity	510 lbs
Platform Occupants (Indoor/Outdoor)	2/0
Platform Height	26'
Machine Length	7' 11"
Machine Width	2' 8"
Machine Height (Rails Up)	7' 7"
Machine Height (Rails Down)	6' 5"
Platform Extension	3'
Deck Extension Capacity	265 lbs
Drive Speed (Lowered)	2.2 Mph
Drive Speed (Elevated)	0.5 Mph
Lift Time	31 Secs
Lower Time	40 Secs
Gradeability	25%
Max Slope/Tilt	1.5°/3°
Amp Hours	(4) 6V x 225Ah
Maximum Ground Bearing Pressure	123 PSI
Tire Size	15" x 5"
Ground Clearance - Center	3.75"
Machine Weight	4,718 lbs

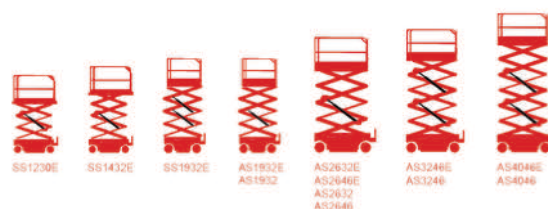

ANSI A92.20 Compliant



## LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: [sales@lmgna.com](mailto:sales@lmgna.com)

Local Sales Contact: