

Standard Configurations

Overload Sensor and Alarm
Tilt/Slope Sensors and Alarm
Self-closing/Self-catching Gate
Higher Platform Rails (Foldable)
Solid Non-marking Tires
Swing-out Component Trays
Descent Protection and Alarm
Flashing Beacons (Both Sides)
Pothole Protectors
Universal Control Box
Quick Disconnect for Control Box
Foot Pedal Extended Platform
Proportional Control
Lanyard Points
Manual Brake Release
Emergency Descent
Horn and Hour Meter
Full Height Drive
Intelligent Diagnostic System
AC Platform Power (GFCI)
Charging Protection System
Wind Rating Stickers
LED Battery Charging Indicator

ANSI A92.20 Slab Scissor Lifts

LGMG

LGMG North America Inc.


ELECTRIC MOTOR DRIVE

AS2646E Scissor Lift (Indoor/Outdoor)

- Optimized to deliver longer-lasting performance for jobs that are inside and outside
- Battery-powered with zero emissions means it is environmentally friendly and great for indoor use
- A superior electronic control system that allows for better braking abilities on long downhill
- Improved steering mechanism reduces tire wear during turning

Product Specifications AS2646E

Platform Capacity	990 lbs
Platform Occupants (Indoor/Outdoor)	2/1
Platform Height	26'
Machine Length	8'
Machine Width	3' 11"
Machine Height (Rails Up)	7' 6"
Machine Height (Rails Down)	5' 8"
Platform Extension	3'
Deck Extension Capacity	265 lbs
Drive Speed (Lowered)	2.5 Mph
Drive Speed (Elevated)	0.5 Mph
Lift Time	35 Secs
Lower Time	40 Secs
Gradeability	25%
Max Slope/Tilt	1.5°/3°
Amp Hours	(4) 6V x 240Ah
Maximum Ground Bearing Pressure	172 PSI
Tire Size	15" x 5"
Ground Clearance - Center	3.75"
Machine Weight	5,986 lbs

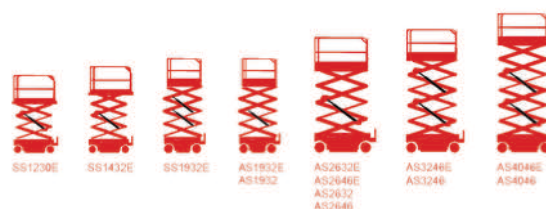

ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: sales@lmgna.com

Local Sales Contact: